



magswitch®

AT EVERY STEP OF THE WAY

Boomer Angle 150

P/N: 8100091

Tool Features


The Magswitch BoomerAngles offer virtually unlimited angles. With a rotating MagSquare at the end of each axis. Magswitch BoomerAngles offers not only a fixed 90 degree angle on the inside and outside, but are adjustable to any angle in between. Featuring the benefits of Magswitch including incredible power and precision control, Magswitch BoomerAngles are easy to use and can be used with larger and heavier steel.

WARNING!
**DO NOT OPERATE UNLESS IN
CONTACT WITH FERROUS TARGET**



Specifications

Max Breakaway *	150 lbs	68 kg
Full Saturation Thickness	0.25"	6 mm
Max Safe Shear *	14 lbs	6 kg
Net Weight	2.9 lbs	1.3 kg
Overall Height	68 mm	
Magnetic Pole Footprint	40mm x 40mm	

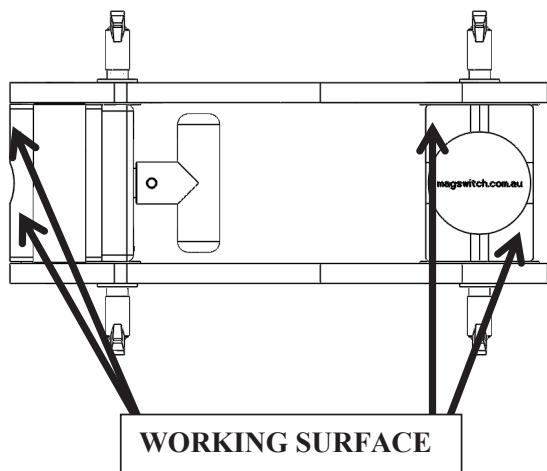

* Max Breakaway determined in laboratory environment on 2" thick SAE1018 Steel with surface roughness 63 micro inches. Many factors contribute to the actual breakaway force in each application. Always test the magswitch in each application before deployment. Refer to the magswitch information booklet for more information.



Magswitch Technologies | 1000 S. McCaslin Blvd.
Suite 301 | Superior | Colorado 80027
+1 (303) 468.0662 | sales@magswitch.com

MSA Magnetics | 14250 Judicial Road
Burnsville, MN | 55306 | 651-272-2950
sales@msamagnetics.com

BOOMER ANGLE 150
8100091




Doc Num 01

Subject to technical and color changes. No liability for errors and
misprints assumed. © Magswitch Technologies 2024

Boomer Angle 150

P/N: 8100091

Drawings

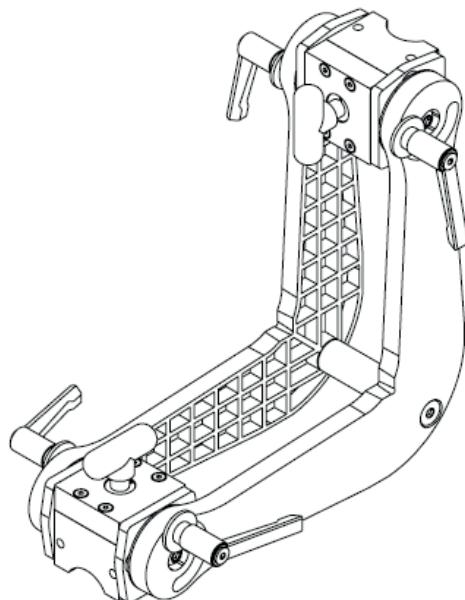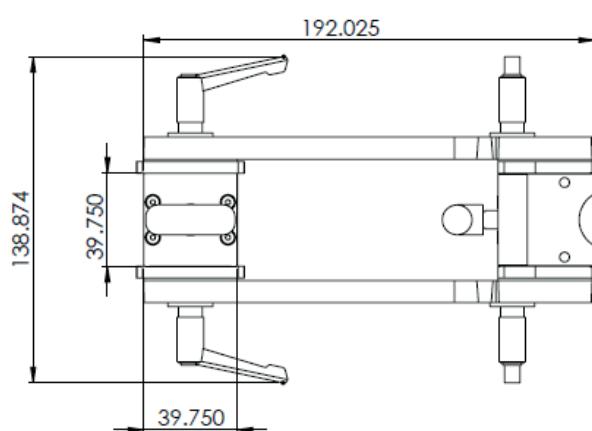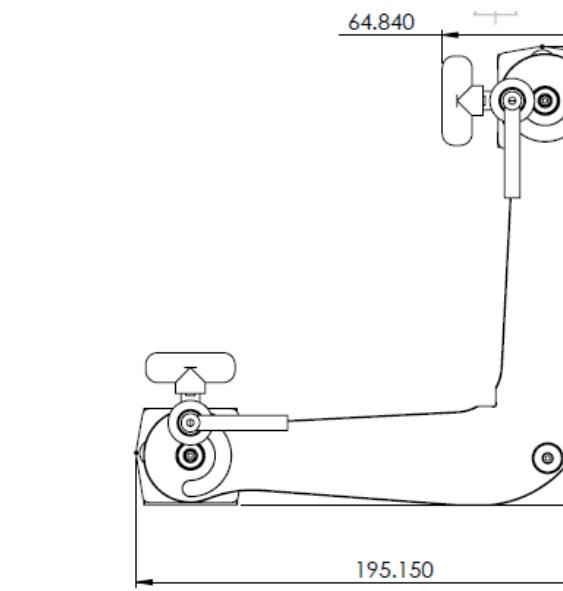

Magswitch Technologies | 1000 S. McCaslin Blvd.
Suite 301 | Superior | Colorado 80027
+1 (303) 468.0662 | sales@magswitch.com

MSA Magnetics | 14250 Judicial Road
Burnsville, MN | 55306 | 651-272-2950
sales@msamagnetics.com

BOOMER ANGLE 150
8100091

Doc Num 01


Subject to technical and color changes. No liability for errors and
misprints assumed. © Magswitch Technologies 2024



Boomer Angle 150

P/N: 8100091

Breakaway Data

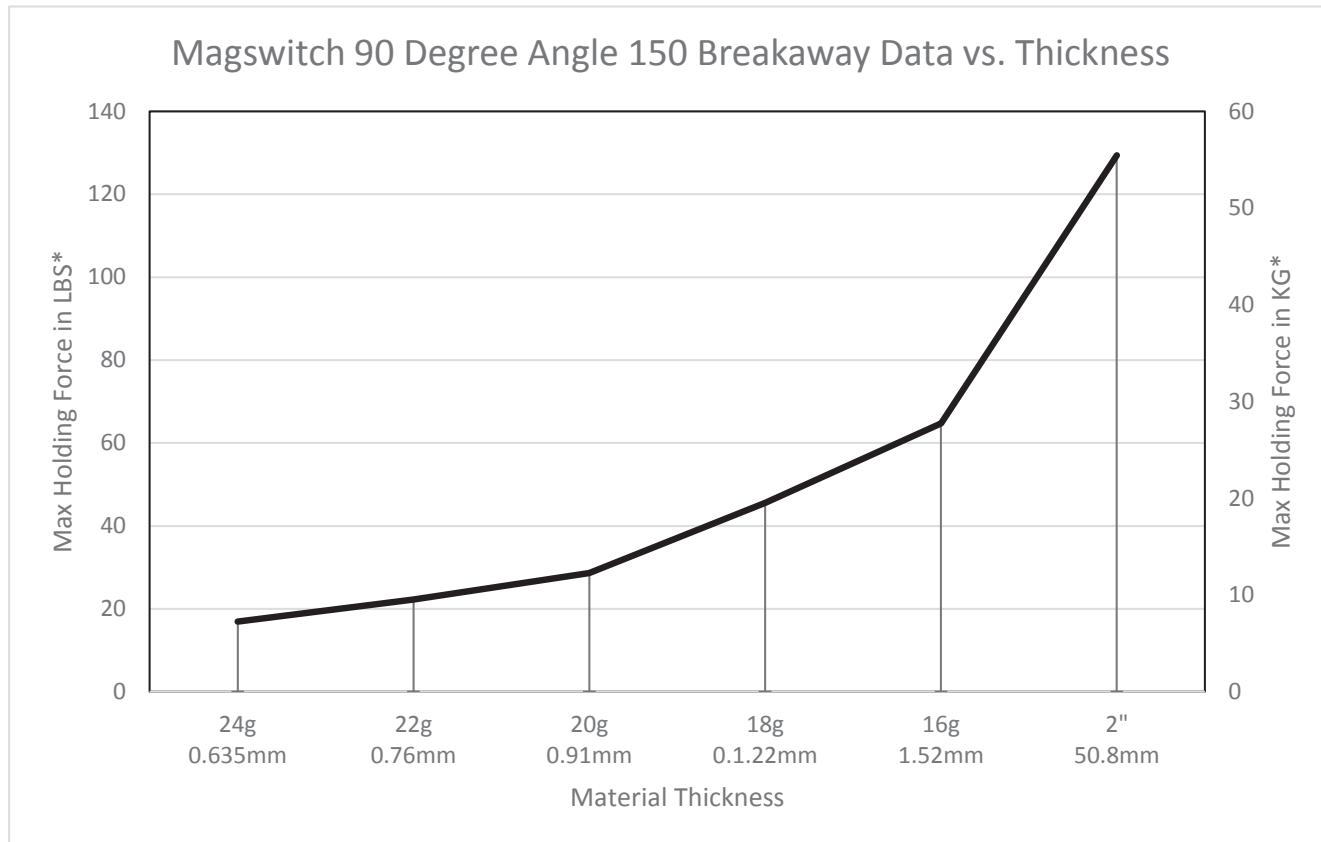

* Max Breakaway determined in laboratory environment on 2" thick SAE1018 Steel with surface roughness 63 micro inches. Many factors contribute to the actual breakaway force in each application. Always test the magswitch in each application before deployment. Refer to the magswitch information booklet for more information.



Magswitch Technologies | 1000 S. McCaslin Blvd.
Suite 301 | Superior | Colorado 80027
+1 (303) 468.0662 | sales@magswitch.com

MSA Magnetics | 14250 Judicial Road
Burnsville, MN | 55306 | 651-272-2950
sales@msamagnetics.com

BOOMER ANGLE 150
8100091

Doc Num 01

Subject to technical and color changes. No liability for errors and
misprints assumed. © Magswitch Technologies 2024