



magswitch®

AT EVERY STEP OF THE WAY


CE6600

P/N: 8140979

Tool Features

- Automatic on/off actuation when landing and placing the workpiece in *AUTO mode*.
- 3:1 safety factor.
- Fail safe – no power required once actuated.
- 300 operation cycles before recharging 8h by power supply of 110V / 230V.
- Variable Flux Output (VFO) for de-stacking (1/4in min)
- On tool button or by wireless remote control

*IMPORTANT note ASME B30.20 standards take precedence over all data provided.
We strongly advise operators to be familiar with this standard prior to using any underhook lifter.*

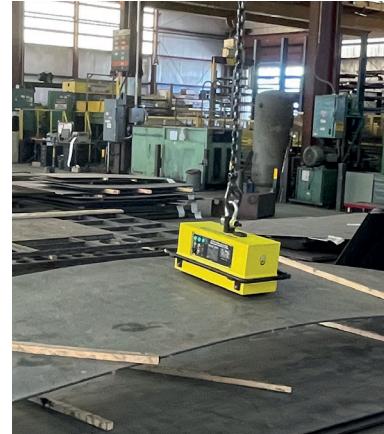

Specifications

Maximum Breakaway Force ^{1,2}	19800lbs / 9000 kg
Breakaway Force @ SWL 3:1	6600lbs / 3000kg
Minimum Thickness for De-Stacking – VFO capable	Level 1: 1/4in / 6mm Level 2: 5/16in / 8mm Level 3: 13/32in / 10mm
Charging Supply Voltage	110V/230V
Charging Time	8 hours
Number of Cycles per Charge	300
Net Weight	418lbs / 190kg
Mounting Option	Single Hoist Ring
Magnetic Footprint (L x W)	18in x 9in / 457.2mm x 228.6mm
Dimensions (L x W x H)	22in x 13.4in x 19.6in / 558.8mm x 340.4mm x 497.8mm

1. Determined in laboratory environment on SAE1018 Steel with surface roughness 63 micro inches with optimized pole shoes. Many factors contribute to the actual breakaway force and safe working load in each application. Consult a Magswitch Applications Engineer and test the Magswitch in each application before deployment.

2. All data applies to unit with standard combination V/flat pole shoes installed.

3. Maximum forces listed above are not safe lifting forces. Designer must take into account safety factor when specifying tool. Magswitch recommends SWL = 3:1 for most lifting applications.

$$\text{SWL (Safe Working Load)} = \frac{\text{Maximum Force}^3}{\text{Safety Factor} (\geq 3)}$$

Magswitch Technologies | 1000 S. McCaslin Blvd.
Suite 301 | Superior | Colorado 80027
+1 (303) 468.0662 | sales@magswitch.com

MSA MAGNETICS
YOUR SOURCE FOR FORCE

MSA Magnetics | 4 Prince of Wales Ave
Unanderra NSW | 2526 | +61 2 4272 8180
sales@msamagnetics.com.au

CE6600
8140979 / REV03

1101665 / REV01

Subject to technical and color changes. No liability for errors and misprints assumed. © Magswitch Technology Inc. 2023




CE6600

P/N: 8140979

Specifications

CE6600	Air gap <0.04in Air gap <0.1mm	Air gap 0.04 to 0.12in Air gap 0.1 to 0.3mm	Air gap 0.12 to 0.20in Air gap 0.3 to 0.5mm
Material Thickness in [mm]	Max. Load lbs [kg]	Max. Load lbs [kg]	Max. Load lbs [kg]
0.157 [4]	485 [220]	429 [195]	374 [170]
0.236 [6]	914 [415]	881 [400]	837 [380]
0.393 [10]	1940 [880]	1895 [860]	1818 [825]
0.511 [13]	2766 [1255]	2689 [1220]	2557 [1160]
0.748 [19]	4365 [1980]	4188 [1900]	3891 [1765]
0.984 [25]	5621 [2550]	5390 [2445]	4927 [2235]
1.496 [38]	6239 [2830]	5908 [2680]	5280 [2395]
1.968 [50]	6613 [3000]	6261 [2840]	5643 [2560]

Drawings

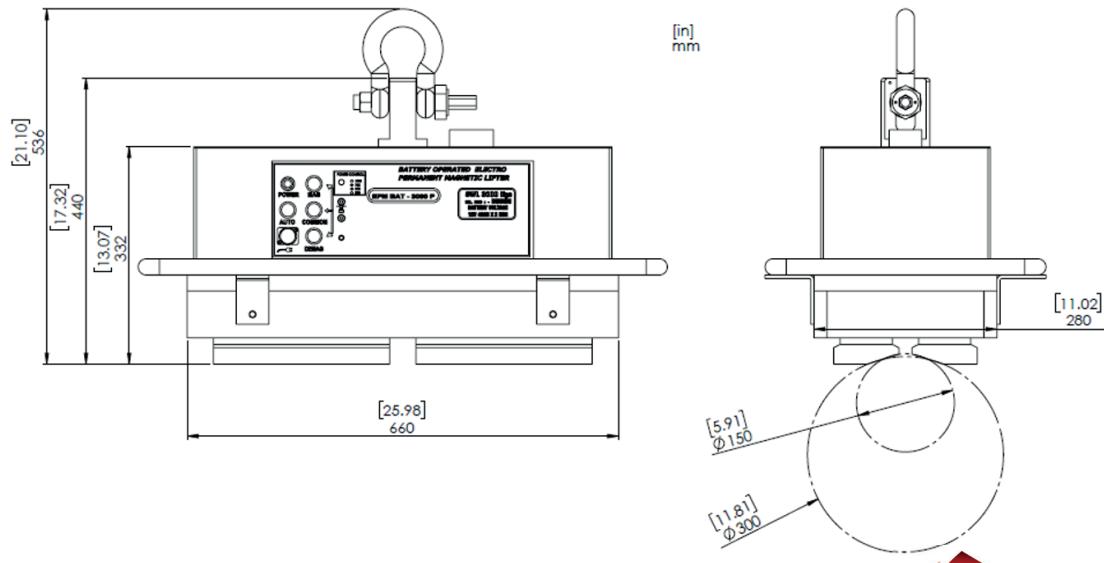

**IMPORTANT note ASME B30.20 standards take precedence over all data provided.
We strongly advise operators to be familiar with this standard prior to using any underhook lifter.**

Magswitch Technologies | 1000 S. McCaslin Blvd.
Suite 301 | Superior | Colorado 80027
+1 (303) 468.0662 | sales@magswitch.com

MSA Magnetics | 4 Prince of Wales Ave
Unanderra NSW | 2526 | +61 2 4272 8180
sales@msamagnetics.com.au

CE6600
8140979 / REV03

1101665 / REV01

Subject to technical and color changes. No liability for errors and
misprints assumed. © Magswitch Technology Inc. 2023