



**magswitch®**

AT EVERY STEP OF THE WAY

# MagSquare 165

P/N: 8100494

## Tool Features

Welders and fabricators are raving about the versatility, convenience and time savings that come with Magswitch MagSquares. MagSquares are extremely powerful magnetic blocks with strong holding force available on all sides. Precisely position the MagSquare and material, and then turn the magnet on with a quick 180° twist to fixture work pieces at right angles. Unlike manual clamping, no weld tabs or edges are required. Use the pre-tapped holes on each side for attaching the MagSquare to non-ferrous tools, jigs, and fixtures. Just turn the magnet off to remove magnetic dust and debris.



**WARNING!**  
DO NOT OPERATE UNLESS IN  
CONTACT WITH FERROUS TARGET

## Specifications

<b>Maximum Breakaway Force <sup>1,2</sup></b>	152.8 lb		69.3 kg				
<b>Maximum Shear <sup>1,2</sup></b>	35.3 lb		16.0 kg				
<b>Full Saturation Thickness <sup>3</sup></b>	0.197 in		5.0 mm				
<b>Side Surface Maximum Breakaway <sup>1,2</sup></b>	93.5 lb		42.4 kg				
<b>Net Weight</b>	0.69 lb		0.312 kg				
<b>Magnetic Pole Footprint</b>	1.89 " x 1.23 "		48 mm x 31.2 mm				
<b>Material Thickness - mm (in)</b>	0.8 (0.031)	1.0 (0.039)	1.5 (0.059)	2.0 (0.079)	3.0 (0.118)	5.0 (0.197)	12.7 (0.500)
<b>Maximum Force <sup>1,2,5</sup> - kg (lbs)</b>	10.67 (23.52)	18.20 (40.12)	26.23 (57.83)	36.33 (80.09)	53.53 (118.01)	69.30 (152.78)	69.17 (152.49)

1. Determined in laboratory environment on SAE1018 Steel with surface roughness 63 micro inches. Many factors contribute to the actual breakaway force and safe working load in each application. Consult a Magswitch Applications Engineer and test the Magswitch in each application before deployment.

2. All data applies to unit with flat pole shoes.

3. Determined with SAE1018 Steel L=200mm W=200mm.

4. Values may vary by +/- 5%.

5. Maximum forces listed above are not safe lifting forces. Designer must take into account safety factor when specifying tool. Magswitch recommends SWL = 5:1 for most applications.



Magswitch Technologies | 1000 S. McCaslin Blvd.  
Suite 301 | Superior | Colorado 80027  
+1 (303) 468.0662 | sales@magswitch.com

MSA Magnetics | 4 Prince of Wales Ave  
Unanderra NSW | 2526 | +61 2 4272 8180  
sales@msamagnetics.com.au

**MAGSQUARE 165**  
8100494


Doc Num 01

Subject to technical and color changes. No liability for errors and misprints assumed. © Magswitch Technologies 2024

# MagSquare 165

P/N: 8100494

## Drawings

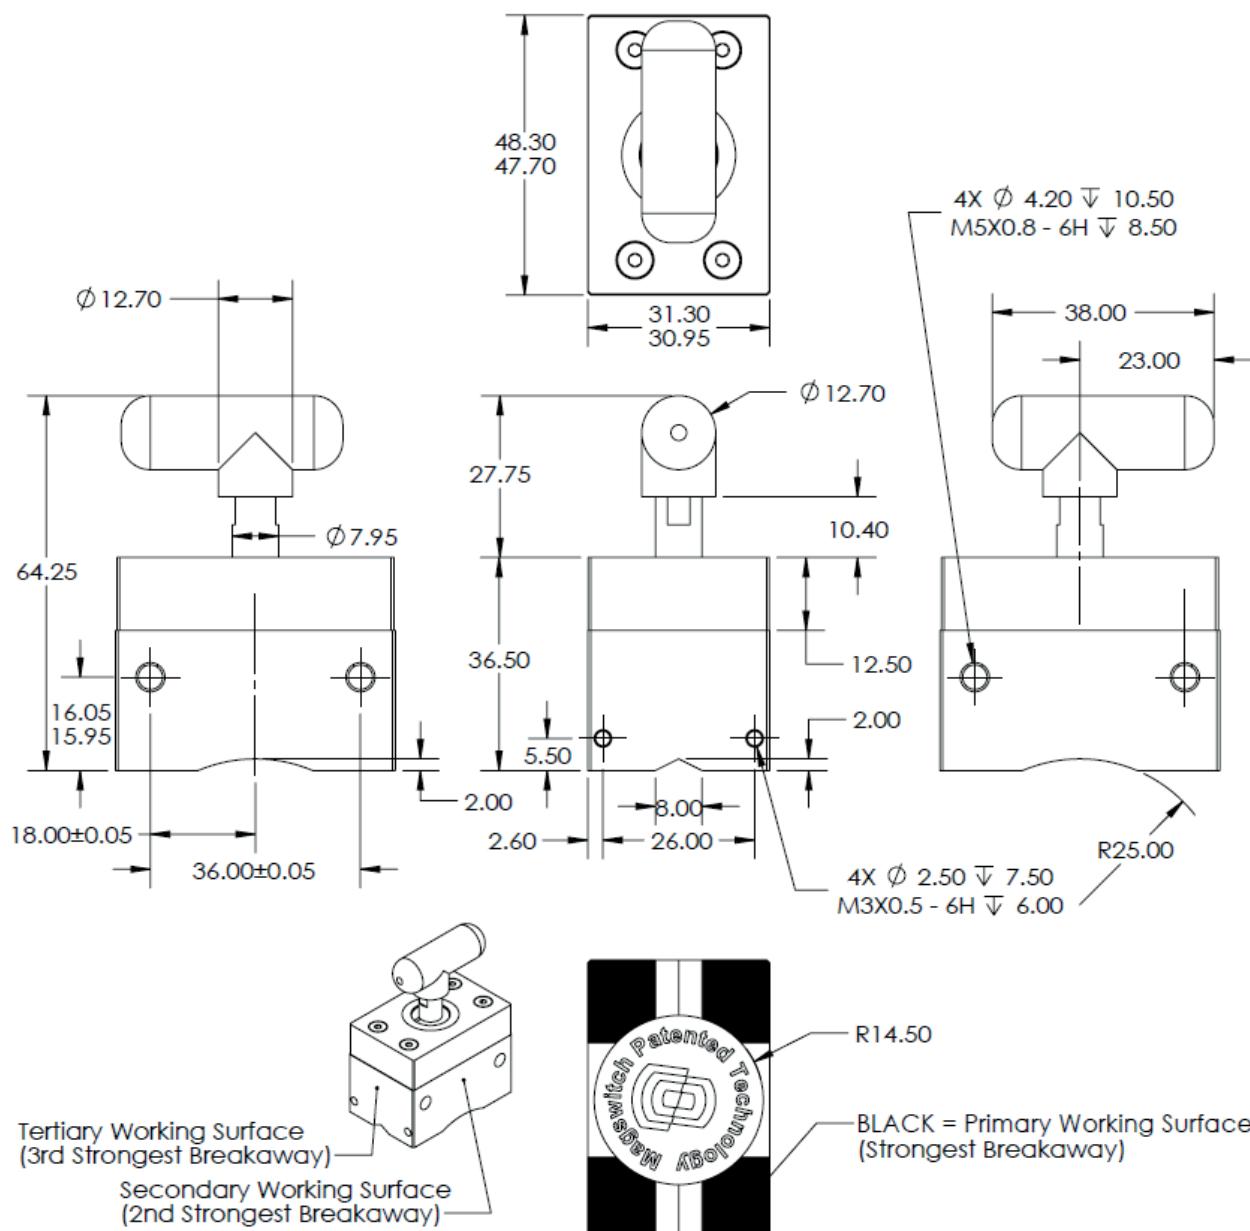

Tertiary Working Surface  
(3rd Strongest Breakaway)

Secondary Working Surface  
(2nd Strongest Breakaway)



Magswitch Technologies | 1000 S. McCaslin Blvd.  
Suite 301 | Superior | Colorado 80027  
+1 (303) 468.0662 | sales@magswitch.com

MSA Magnetics | 4 Prince of Wales Ave  
Unanderra NSW | 2526 | +61 2 4272 8180  
sales@msamagnetics.com.au

**MAGSQUARE 165**  
8100494

Doc Num 01

Subject to technical and color changes. No liability for errors and  
misprints assumed. © Magswitch Technologies 2024