



PRODUCT CATALOG



American Distributor for the
Renowned Magswitch Range!

(651) 272 2950
www.msamagnetics.com

YOUR SOURCE FOR FORCE



MSA MAGNETICS



TABLE OF CONTENTS

Contents

Magswitch Range 4 - 11

Magswitch 90 Degree Angles	5
Magswitch Boomer Angles	5
Magswitch Ground Clamps	6
Magswitch Mag-Utility Hooks	7
Magswitch Pivot Angles	7
Magswitch MagMounts	8
Magswitch MagSquares	9
Magswitch Mini Angles	10
Magswitch MagJigs	11

Magswitch No-Touch Tool Range 12 - 15

Magswitch Hand Lifters	13
Magswitch MagDolly	14
Magswitch Extenda-Lifts	14
Magswitch MagReach 400	15

Magswitch Lifting Magnets 16 - 19

Magswitch MLAY Lifting Magnets	17-18
Magswitch CE Magnetic Lifters	19

MSA Cable Safety Range 20 - 21

MSA FRAS Cable-Mate Magnetic Lead Holder	21
MSA Cable-Mate Magnetic Lead Holder	21
MSA Cable-Buddy Magnetic Lead Holder	21

MSA Welding Torch Holders 22 - 23

MSA Mig-Mate Welding Torch Holder	23
MSA Tig-Mate Welding Torch Holder	23

MSA Shallow Pot Magnets 24 - 27

A-Series – CSK Centre Hole	25
B-Series – Straight Hole	25
C-Series – Male Thread	26
D-Series – Female Threaded Boss	26
E-Series – Complete with Hook	27

Bluestreak Magnetic Sweepers 28 - 31

Caiman Tow-Behind Magnetic Sweeper	29
Fusion Continuous Discharge Magnet	29
Meerkat Front Mount Magnet	29
Oblast Fork Mounted Magnetic Sweeper	30
Piranha Tow-Behind Magnet	30
PowerStick Pro Elite Handheld Sweeper	31
Razor Towable Magnetic Sweeper	31
Rhino Tow-Behind Magnet	31

MSA Magnetic Separators 32 - 35

Overbelt & Suspension Magnets	33
Magnetic Head Pulleys	33
Drum Magnet	33
Grate Magnet	34
Grate Magnet in Housing	34
Easy-Clean Grate Magnet	34
Plate Magnet	35
Finger Pot Liquid Magnet	35
Probe Magnet	35

Magnattack Magnetic Mats 36 - 37

Mag-Stride Magnetic Mat	37
Industrial Retention Mat	37
Magnetic Mat Cleaning Tool	37



MAGSWITCH
RANGE

Magswitch 90 Degree Angles

90° ANGLE 165

CODE: 8100548



Max Breakaway:	150 lbs
Full Saturation Thickness:	0.2 in
Max Shear:	19 lbs
Net Weight:	2 lbs
Overall Height:	8 in
Magnetic Pole Footprint:	2 x 1 in

90° ANGLE 400

CODE: 8100454



Max Breakaway:	399 lbs
Full Saturation Thickness:	0.3 in
Max Shear:	20 lbs
Net Weight:	6 lbs
Overall Height:	11 in
Magnetic Pole Footprint:	3 x 2 in

90° ANGLE 600

CODE: 8100495



Max Breakaway:	607 lbs
Full Saturation Thickness:	0.4 in
Max Shear:	61 lbs
Net Weight:	8 lbs
Overall Height:	11 in
Magnetic Pole Footprint:	3 x 2 in

Magswitch BoomerAngles

BOOMERANGLE 150

CODE: 8100091



Max Breakaway:	150 lbs
Full Saturation Thickness:	0.2 in
Max Shear:	13 lbs
Net Weight:	3 lbs
Overall Height:	8 in
Magnetic Pole Footprint:	2 x 2 in

BOOMERANGLE 400

CODE: 8100453



Max Breakaway:	399 lbs
Full Saturation Thickness:	0.1 in
Max Shear:	20 lbs
Net Weight:	7 lbs
Overall Height:	10 in
Magnetic Pole Footprint:	3 x 2 in

BOOMERANGLE 600

CODE: 8100090



Max Breakaway:	600 lbs
Full Saturation Thickness:	0.4 in
Max Shear:	60 lbs
Net Weight:	10 lbs
Overall Height:	10 in
Magnetic Pole Footprint:	3 x 2 in

Magswitch Ground Clamps

300 AMP FINNED MAGNETIC GROUND CLAMP

CODE: 8100746

Magnet Strength:	88 lbs
Net Weight:	14 oz
Overall Height:	2 in
Magnetic Pole Footprint:	2 in Ø



600 AMP FINNED MAGNETIC GROUND CLAMP

CODE: 8100747

Magnet Strength:	196 lbs
Net Weight:	2 lbs
Overall Height:	3 in
Magnetic Pole Footprint:	3 in Ø



800 AMP FINNED MAGNETIC GROUND CLAMP

CODE: 8100552

Magnet Strength:	300 lbs
Net Weight:	4 lbs
Overall Height:	3 in
Magnetic Pole Footprint:	4 in Ø



Magswitch Mag-Utility Hooks

MAG-UTILITY HOOK 25

CODE: 8100012



Max Breakaway:	103 lbs
Full Saturation Thickness:	0.2 in
Max Shear:	20 lbs
Net Weight:	7 oz
Overall Height:	4 in
Magnetic Pole Footprint:	2 in Ø

MAG-UTILITY HOOK 40

CODE: 8100006



Max Breakaway:	186 lbs
Full Saturation Thickness:	0.2 in
Max Shear:	35 lbs
Net Weight:	2 lbs
Overall Height:	4 in
Magnetic Pole Footprint:	3 in Ø

Magswitch Pivot Angles

PIVOT ANGLE 150 MINI

CODE: 81001269



Max Breakaway:	183 lbs
Full Saturation Thickness:	0.2 in
Max Safe Shear:	24 lbs
Net Weight:	2 lbs
Overall Height:	6 in
Magnetic Pole Footprint:	1 x 2 in

PIVOT ANGLE 150 MAX

CODE: 81001215



Max Breakaway:	183 lbs
Full Saturation Thickness:	0.2 in
Max Safe Shear:	24 lbs
Net Weight:	3 lbs
Overall Height:	8 in
Magnetic Pole Footprint:	1 x 2 in

Magswitch MagMounts

MAGMOUNT 150

CODE: 8100579



Max Breakaway:	150 lbs
Full Saturation Thickness:	0.10 in
Max Shear:	11 lbs
Net Weight:	14 oz
Overall Height:	2 in
Magnetic Pole Footprint:	2 x 1 in

MAGMOUNT 235

CODE: 8100451



Max Breakaway:	234 lbs
Full Saturation Thickness:	0.2 in
Net Weight:	1 lbs
Overall Height:	2 in
Magnetic Pole Footprint:	2 x 2 in

MAGMOUNT 300

CODE: 8100595



Max Breakaway:	245 lbs
Full Saturation Thickness:	0.2 in
Net Weight:	1 lbs
Overall Height:	2 in
Magnetic Pole Footprint:	3 x 2 in

MAGMOUNT 400

CODE: 8100523



Max Breakaway:	401 lbs
Full Saturation Thickness:	0.2 in
Net Weight:	1 lbs
Overall Height:	3 in
Magnetic Pole Footprint:	3 x 2 in

MAGMOUNT 600

CODE: 8100580



Max Breakaway:	520 lbs
Full Saturation Thickness:	0.4 in
Max Shear:	104 lbs
Net Weight:	4 lbs
Overall Height:	3 in
Magnetic Pole Footprint:	3 x 2 in

Magswitch MagSquares

MAGSQUARE 165

CODE: 8100494



Max Breakaway:	153 lbs
Full Saturation Thickness:	0.2 in
Max Shear:	35 lbs
Net Weight:	11 oz
Overall Height:	3 in
Magnetic Pole Footprint:	2 x 1 in

MAGSQUARE 400

CODE: 8100238



Max Breakaway:	399 lbs
Full Saturation Thickness:	0.2 in
Max Shear:	40 lbs
Net Weight:	2 lbs
Overall Height:	4 in
Magnetic Pole Footprint:	3 x 2 in

MAGSQUARE 600

CODE: 8100106



Max Breakaway:	600 lbs
Full Saturation Thickness:	0.4 lbs
Max Shear:	60 lbs
Net Weight:	3 lbs
Overall Height:	4 in
Magnetic Pole Footprint:	3 x 2 in

MAGSQUARE 1000

CODE: 8100099



Max Breakaway:	1,001 lbs
Full Saturation Thickness:	0.5 in
Max Shear:	148 lbs
Net Weight:	7 lbs
Overall Height:	6 in
Magnetic Pole Footprint:	3 x 4 in

Magswitch Mini Angles

MINI ANGLE

CODE: 8100352



Max Breakaway:	88 lbs
Full Saturation Thickness:	0.1 in
Max Shear:	6 lbs
Net Weight:	7 oz
Overall Height:	2 in
Magnetic Pole Footprint:	2 x 1 in

MINI MULTI ANGLE

CODE: 8100350



Max Breakaway:	88 lbs
Max Shear:	6 lbs
Net Weight:	7 oz
Overall Height:	3 in
Magnetic Pole Footprint:	1 x 3 in

MINI MULTI ANGLE WITH 300 AMP GROUND CLAMP

CODE: 8100351



Max Breakaway:	148 lbs
Full Saturation Thickness:	0.1 in
Max Shear:	6 lbs
Net Weight:	14 oz
Overall Height:	3 in
Magnetic Pole Footprint:	4 x 2 in

MINI MULTI ANGLE 400

CODE: 8100438



Max Breakaway:	399 lbs
Full Saturation Thickness:	0.1 in
Max Shear:	20 lbs
Net Weight:	3 lbs
Overall Height:	4 in
Magnetic Pole Footprint:	3 x 2 in

Magswitch MagJigs

MAGJIG 60

CODE: 8100818



Max Breakaway:	55 lbs
Full Saturation Thickness:	0.1 in
Max Shear:	11 lbs
Net Weight:	4 oz
Overall Height:	2 in
Magnetic Pole Footprint:	1 x 0.6 in

MAGJIG 95

CODE: 8110004



Max Breakaway:	68 lbs
Full Saturation Thickness:	0.1 in
Max Shear:	20 lbs
Net Weight:	4 oz
Overall Height:	2 in
Magnetic Pole Footprint:	1 x 0.8 in

MAGJIG 150

CODE: 8110005



Max Breakaway:	134 lbs
Full Saturation Thickness:	0.1 in
Max Shear:	37 lbs
Net Weight:	7 oz
Overall Height:	2 in
Magnetic Pole Footprint:	2 x 1 in

MAGJIG 235

CODE: 8100377



Max Breakaway:	217 lbs
Full Saturation Thickness:	0.2 in
Max Shear:	49 lbs
Net Weight:	1 lbs
Overall Height:	3 in
Magnetic Pole Footprint:	2 x 2 in

MAGJIG 60 KEYCHAIN

CODE: 8100514



Max Breakaway:	60 lbs
Full Saturation Thickness:	0.1 in
Max Shear:	15 lbs
Net Weight:	4 oz
Overall Height:	2 in
Magnetic Pole Footprint:	1 x 0.6 in



MAGSWITCH **NO-TOUCH TOOL RANGE**

Magswitch Hand Lifters

HAND LIFTER 60-M (MANUAL)

CODE: 8100359



Max Breakaway:	217 lbs
Full Saturation Thickness:	0.2 in
Max Shear:	49 lbs
Net Weight:	2 lbs
Overall Height:	6 in
Magnetic Pole Footprint:	2 x 2 in

FIXED SINGLE HAND LIFTER 235

CODE: 8100795



Max Breakaway:	234 lbs
Full Saturation Thickness:	0.2 in
Net Weight:	2 lbs
Overall Height:	4 in
Magnetic Pole Footprint:	2 x 2 in

FIXED SINGLE HAND LIFTER 400

CODE: 8100810



Max Breakaway:	390 lbs
Full Saturation Thickness:	0.4 in
Net Weight:	2 lbs
Overall Height:	5 in
Magnetic Pole Footprint:	3 x 2 in

HAND LIFTER 60-CE (CORDLESS ELECTRIC) W/ HOLSTER

CODE: 8800487



Max Breakaway:	197 lbs
Full Saturation Thickness:	0.3 in
Max Shear:	45 lbs
Net Weight:	2 lbs
Overall Height:	8 in
Magnetic Pole Footprint:	2 x 2 in

FIXED DUAL HAND LIFTER 235

CODE: 8100821



Max Breakaway:	470 lbs
Full Saturation Thickness:	0.2 in
Net Weight:	4 lbs
Overall Height:	4 in
Magnetic Pole Footprint:	2 x (2.2 x 1.7) in

FIXED DUAL HAND LIFTER 400

CODE: 8100822



Max Breakaway:	800 lbs
Full Saturation Thickness:	0.4 in
Net Weight:	6 lbs
Overall Height:	5 in
Magnetic Pole Footprint:	2 x (2.6 x 1.7) in

Magswitch Mag Dolly

MAG DOLLY

CODE: 8100433

Net Weight:	62 lbs
Overall Height (Extended):	5 ft
Overall Length (Collapsed):	3 ft
Wheel Size:	8 in OD
Lifting Capacity:	350 lbs



Magswitch Extenda-Lifts



EXTENDA-LIFT 600

CODE: 8100025

Max Breakaway:	600 lbs
Full Saturation Thickness:	0.4 in
Max Shear:	45 lbs
Net Weight:	5 lbs
Overall Height:	2 ft
Magnetic Pole Footprint:	5 x 3 in



EXTENDA-LIFT 1000

CODE: 8130177


Max Breakaway:	1,001 lbs
Full Saturation Thickness:	0.5 in
Max Shear:	148 lbs
Net Weight:	10 lbs
Overall Height:	2 ft
Magnetic Pole Footprint:	3 x 4 in

Magswitch MagReach

MAGREACH 400

CODE: 81001594

Max Breakaway:	381 lbs
Full Saturation Thickness:	0.4 in
Max Shear:	77 lbs
Overall Adjustable Height:	4 ft - 7 ft
Net Weight:	8 lbs

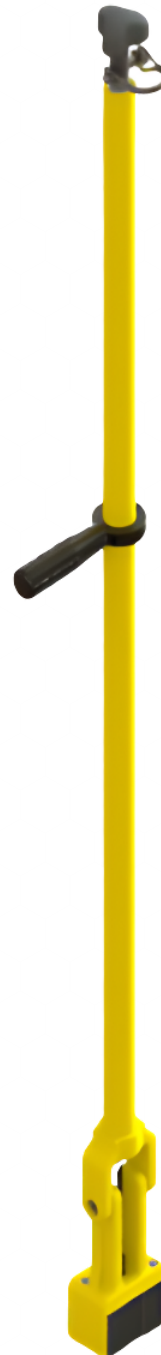



MAGSWITCH **LIFTING MAGNETS**

Magswitch MLAY Lifting Magnets

MLAY600 LIFTING MAGNET

CODE: 8100089



Safe Working Load:	194 lbs
Full Saturation Thickness:	0.5 in
Max Safe Shear:	70 lbs
Min. Thickness for De-stack:	0.4 in
Max Breakaway:	584 lbs
Net Weight:	4 lbs

MLAY600X2 LIFTING MAGNET

CODE: 8100360



Safe Working Load:	368 lbs
Full Saturation Thickness:	0.4 in
Max Safe Shear:	200 lbs
Min. Thickness for De-stack:	0.4 in
Max Breakaway:	1,102 lbs
Net Weight:	9 lbs

MLAY600X4 LIFTING MAGNET

CODE: 8100364



Safe Working Load:	750 lbs
Full Saturation Thickness:	0.8 in
Max Safe Shear:	441 lbs
Min. Thickness for De-stack:	0.4 in
Max Breakaway:	2,218 lbs
Net Weight:	21 lbs

MLAY1000 LIFTING MAGNET

CODE: 8100088



Safe Working Load:	333 lbs
Full Saturation Thickness:	0.5 in
Max Safe Shear:	50 lbs
Min. Thickness for De-stack:	0.5 in
Max Breakaway:	1,001 lbs
Net Weight:	11 lbs

Magswitch MLAY Lifting Magnets

MLAY1000X2 LIFTING MAGNET

CODE: 8100484



Safe Working Load:	668 lbs
Full Saturation Thickness:	0.5 in
Max Safe Shear:	126 lbs
Min. Thickness for De-stack:	0.8 in
Max Breakaway:	2,000 lbs
Net Weight:	24 lbs

MLAY1000X3 LIFTING MAGNET

CODE: 8100403



Safe Working Load:	913 lbs
Full Saturation Thickness:	0.8 in
Max Safe Shear:	198 lbs
Min. Thickness for De-stack:	0.8 in
Max Breakaway:	2,738 lbs
Net Weight:	37 lbs

MLAY1000X4 LIFTING MAGNET

CODE: 8100418



Safe Working Load:	1,215 lbs
Full Saturation Thickness:	0.8 in
Max Safe Shear:	284 lbs
Min. Thickness for De-stack:	0.8 in
Max Breakaway:	3,647 lbs
Net Weight:	45 lbs

MLAY1000X6 LIFTING MAGNET

CODE: 8100482



Safe Working Load:	2,033 lbs
Full Saturation Thickness:	1 in
Max Safe Shear:	618 lbs
Min. Thickness for De-stack:	1 in
Max Breakaway:	6,100 lbs
Net Weight:	60 lbs

Magswitch CE Magnetic Lifters

CE 1100 MAGNETIC LIFTER

CODE: 8140977

3:1 Safe Working Load:	1,102 lbs
Max Breakaway:	3,307 lbs
Net Weight:	55 lbs



CE 2100 MAGNETIC LIFTER

CODE: 8140978

3:1 Safe Working Load:	2,094 lbs
Max Breakaway:	6,283 lbs
Net Weight:	90 lbs



CE 6600 MAGNETIC LIFTER

CODE: 8140979

3:1 Safe Working Load:	6,614 lbs
Max Breakaway:	19,842 lbs
Net Weight:	419 lbs





MSA
CABLE SAFETY RANGE

MSA Cable Safety Range

FRAS CABLE-MATE

CODE: MSAFRCM10

Supports Weight: 55 lbs (±5%)

Dimensions: 4 x 9 in



CABLE-MATE

CODE: MSACM10

Supports Weight: 55 lbs (±5%)

Dimensions: 4 x 9 in



CABLE-BUDDY

CODE: MSACB10

Supports Weight: 11 lbs (±5%)

Dimensions: 1 x 5 in





MSA
WELDING TORCH
HOLDERS

MSA Welding Torch Holders

MIG-MATE

CODE: MSAMIGM

Height:	5 in
Weight:	2 lbs
Magnetic Base:	3 in Ø



TIG-MATE

CODE: MSATIGM

Height:	7 in
Weight:	2 lbs
Magnetic Base:	3 in Ø






MSA **SHALLOW** **POT MAGNETS**

HIGH GRADE NEODYMIUM


The Strongest Magnet Found in Nature!

A-Series - CSK Centre Hole

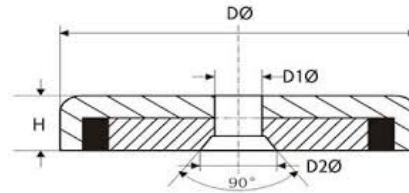


Part#	D (in)	D1 (in)	D2 (in)	H (in)	Attraction (lbs)	DeadWeight (oz)
MSAA16	0.6	0.1	0.3	0.2	11	0.2
MSAA20	0.8	0.2	0.3	0.3	13.2	0.5
MSAA25	1	0.2	0.4	0.3	30.9	0.8
MSAA32	1.3	0.2	0.4	0.3	55.1	1.4
MSAA36	1.4	0.3	0.5	0.4	63.9	1.8
MSAA42	1.7	0.3	0.5	0.4	81.6	2.7
MSAA48	1.9	0.3	0.6	0.5	149.9	4.2
MSAA60	2.4	0.3	0.6	0.6	246.9	8.9
MSAA75	3	0.4	0.7	0.7	357.1	17.2

B-Series - Straight Hole

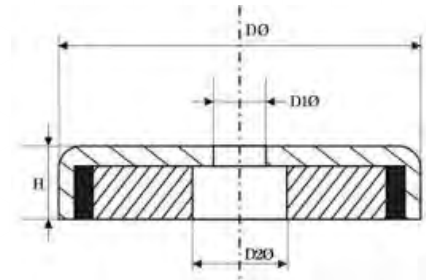


Part#	D (in)	D1 (in)	D2 (in)	H (in)	Attraction (lbs)	DeadWeight (oz)
MSAB16	0.6	0.1	0.3	0.2	8.8	0.2
MSAB20	0.8	0.2	0.3	0.3	13.2	0.4
MSAB25	1	0.2	0.4	0.3	30.9	0.8
MSAB32	1.3	0.2	0.4	0.3	50.7	1.3
MSAB36	1.4	0.3	0.4	0.4	63.9	1.8
MSAB42	1.7	0.3	0.4	0.4	70.5	2.6
MSAB48	1.9	0.3	0.6	0.5	138.9	4
MSAB60	2.4	0.3	0.6	0.6	209.4	8.5
MSAB75	3	0.4	0.7	0.7	341.7	16.6
MSAB88	3.5	0.5	0.8	0.8	396.8	16.9

C-Series - Male Thread

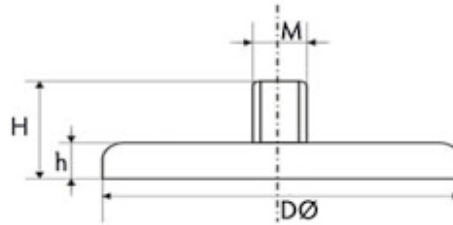


Part#	D (in)	D1 (in)	D2 (in)	H (in)	Attraction (lbs)	DeadWeight (oz)
MSAC10	0.4	0.1	0.5	0.2	4.9	0.1
MSAC16	0.6	0.2	0.5	0.2	12.1	0.3
MSAC20	0.8	0.2	0.6	0.3	19.8	0.6
MSAC25	1	0.2	0.7	0.3	48.5	1.1
MSAC32	1.3	0.2	0.7	0.3	75	1.6
MSAC36	1.4	0.2	0.7	0.3	90.4	2
MSAC42	1.7	0.3	0.8	0.4	149.9	3
MSAC48	1.9	0.3	0.9	0.5	178.6	4.6
MSAC60	2.4	0.3	1.2	0.6	249.1	9
MSAC75	3	0.4	1.3	0.6	361.6	19.4

D-Series - Female Threaded Boss

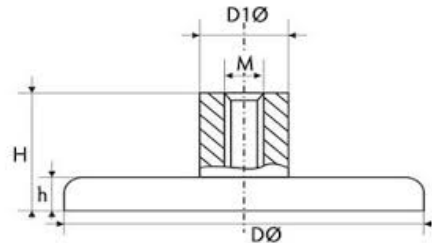

Part#	D (in)	D1 (in)	D2 (in)	H (in)	Attraction (lbs)	DeadWeight (oz)
MSAD10	0.4	0.1	0.5	0.2	4.9	0.1
MSAD16	0.6	0.2	0.5	0.2	12.1	0.3
MSAD20	0.8	0.2	0.6	0.3	19.8	0.6
MSAD25	1	0.2	0.7	0.3	48.5	1.1
MSAD32	1.3	0.2	0.7	0.3	75	1.7
MSAD36	1.4	0.2	0.7	0.3	90.4	2.1
MSAD42	1.7	0.2	0.8	0.4	149.9	3.1
MSAD48	1.9	0.3	0.9	0.5	178.6	4.7
MSAD60	2.4	0.3	1.2	0.6	249.1	9.5
MSAD75	3	0.4	1.3	0.7	361.6	19.5

E-Series - Complete with Hook



Part#	D (in)	D1 (in)	D2 (in)	H (in)	Attraction (lbs)	DeadWeight (oz)
MSAE16	0.6	0.2	0.6	0.2	12.1	0.4
MSAE20	0.8	0.2	0.6	0.3	19.8	0.7
MSAE25	1	0.2	0.7	0.3	48.5	1.1
MSAE32	1.3	0.2	0.6	0.3	75	2
MSAE36	1.4	0.2	0.6	0.3	90.4	2.4
MSAE42	1.7	0.2	0.6	0.4	149.9	3.4
MSAE48	1.9	0.3	0.9	0.5	178.6	5.4
MSAE60	2.4	0.3	0.9	0.6	249.1	9.9
MSAE75	3	0.4	1	0.7	361.6	19.8



BLUESTREAK
MAGNETIC
SWEEPERS

Bluestreak Magnetic Sweepers

CAIMAN TOW-BEHIND MAGNETIC SWEEPER

Sweeping Width:	82"
Magnet Assembly Dimensions:	4" H x 6" W x 82" L
Total Product Weight:	900.1 lbs
Total Shipping Weight:	997.1 lbs
Wheels:	16.5" x 6.5"
Sweeping Height Adjustability:	Continuous 2"- 6"



FUSION CONTINUOUS DISCHARGE MAGNET

Sweeping Width:	24"
Ground Clearance:	0.150" at lowest point
Total Product Weight:	35 lbs
Total Shipping Weight:	39.5 lbs
Wheels:	5" on front; 3" on rear
Debris Tray:	Yes - Removable Tray



MEERKAT FRONT MOUNT MAGNET

Sweeping Width:	67"
Magnet Housing Dimensions:	3 housings, each: 5.25" H x 6.8" W x 20.75" L
Magnet Dimensions Inside Housing:	6" W x 5" H x 20" L
Total Product Weight:	737 lbs
Total Shipping Weight:	821 lbs
Maximum Lifting Height:	10"



Bluestreak Magnetic Sweepers

OBLAST FORK MOUNTED MAGNETIC SWEEPER

Sweeping Width:	52"
Internal Magnet Dimensions:	4" H x 6" W x 52" L (across 3 unspaced housings)
Magnet Dimensions Inside Housing:	6" W x 5" H x 20" L
Total Product Weight:	305 lbs
Total Shipping Weight:	389 lbs
Maximum Lifting Height:	Up to 10.5"



PIRANHA96 TOW-BEHIND MAGNET

Sweeping Width:	72"
Sweeper Magnetic Housing Height:	4.5"
Sweeper Magnetic Housing Face Depth:	9"
Magnet Dimensions Inside Housing:	32" L x 3" H x 8" W
Total Product Weight:	678 lbs
Maximum Lifting Height:	10.5"



PIRANHA120 TOW-BEHIND MAGNET

Sweeping width:	96"
Sweeper Magnetic Housing Height:	4.5"
Sweeper Magnetic Housing Face Depth:	9"
Magnet Dimensions Inside Housing:	44" L x 3" H x 8" W
Total Product Weight:	832 lbs
Maximum Lifting Height:	10.5"



Bluestreak Magnetic Sweepers

POWERSTICK PRO ELITE HANDHELD SWEEPER

Sweeper Width:	12"
Sweeper Magnetic Housing Height:	1" square tube
Sweeper Magnetic Housing Face Depth:	1" square tube
Total Product Weight:	4.3 lbs
Total Shipping Weight:	6 lbs
Overall Height:	50.5"-55"



RAZOR TOWABLE MAGNETIC SWEEPER

Sweeping Width:	Available in 3", 4", 5", 6", 7", 8" lengths
Sweeper Magnetic Housing Height:	Available in 3" or 4.5"
Sweeper Magnetic Housing Face Depth:	Available in 3" or 4.5"
Total Product Weight:	48 lbs - 147 lbs (depending on size)
Lifting Weight:	30 lbs - 100 lbs (depending on size)
Height Adjustability:	1", 2" or 3" by moving axle position



RHINO TOW-BEHIND MAGNET

Sweeping Width:	Available in 5", 6", 7" lengths
Sweeper Magnetic Housing Height:	4.5"
Sweeper Magnetic Housing Face Depth:	4.5"
Total Product Weight (Each Size):	252 lbs, 277 lbs, 302 lbs
Lifting Weight (Each Size):	100 lbs, 120 lbs, 140 lbs
Maximum Lifting Height:	8.5"





CO-FORCE



DANGER!
High Strength Magnet



S/N:2507/6465B

MSA
MAGNETIC
SEPARATORS

MSA Magnetic Separators

OVERBELT & SUSPENSION MAGNETS

Types Available:	Crossbelt or Inline
Models Available to Suit Belt Widths:	16" - 60"
Types:	Permanent, electromagnetic suspension and cross belt
Self-Cleaning:	Yes
Manual Cleaning:	Yes
USA Made	



MAGNETIC HEAD PULLEYS

Types Available:	Rare Earth, Ceramic
Widths Available:	Customizable to suit application
Existing Pulley Conversions:	Yes
Shaft:	Keyed



DRUM MAGNET

Opening Size:	Customizable to suit application
Types Available:	Rare Earth, Ceramic
Cleaning:	Continuous self-cleaning



MSA Co-Force Magnetic Separators

GRATE MAGNET

Sizes Available:	6 x 6; 8 x 8; 10 x 10; 12 x 12; 16 x 16; 18 x 18; Custom Sizes Available
Magnetics:	Rare earth
Magnet Strength:	9-10,000 gauss
Configuration:	Square and round
Construction:	304 stainless steel



GRATE MAGNET IN HOUSING

Sizes Available:	10 x 10; 12 x 12; 16 x 16; 18 x 18
Magnetics:	Rare earth
Magnet Strength:	9-10,000 gauss
Configuration:	Square in housing. Removable magnet grid/grates. Double and single row versions available
Construction:	304 stainless steel
Connections:	Flanged



EASY CLEANING GRATE MAGNET

Sizes Available:	12.5 x 10; 14.5 x 12; Custom Sizes Available
Magnetics:	Rare earth
Magnet Strength:	9-10,000 gauss
Configuration:	Square in housing. Pull out drawer for cleaning. Double and single row versions available
Construction:	304 stainless steel
Connections:	Flanged



MSA Co-Force Magnetic Separators

PLATE MAGNET

Models Available:	Flat Face; Stepped Face; 2 Pole Raised Pole
Widths Available:	6", 8", 10", 12", 14", 16"
Magnetics:	Rare Earth
Magnet Surface Strengths Available:	7,000 gauss; 10,000 gauss
Construction:	304 stainless steel
Configuration:	Flanged with hinge mounting



FINGER POT LIQUID MAGNET

Styles Available:	135; 170
Sizes Available:	1.5", 2", 2.5", 3", 4"
Magnetics:	Rare earth
Magnet Surface Strengths Available:	9-10,000 gauss
Construction:	304 stainless steel
Configuration:	Inlet/outlet tri-clamp connections unless special order



PROBE MAGNET

Sizes Available:	3", 4", 5", 6", 8", 10"
Magnetics:	Rare earth
Magnet Surface Strengths Available:	9-10,000 gauss
Construction:	304 stainless steel
Configuration:	2" tri-clamp standard





MSA MAGNETICS



MAGNATTACK **MAGNETIC** **MATS**

Magnattack Magnetic Mats

MAG-STRIDE MAGNETIC MAT

CODE: MS970770

Weight:	71 lbs
Overall Size:	30.3" x 38.2"
Magnetics:	Rare earth
Cover Mat:	Woven low pile, washable
Certifications:	HACCP Certified



INDUSTRIAL RETENTION MAT

Weight:	71 lbs
Overall Size:	30.3" x 38.2"
Magnetics:	Rare earth
Cover Mat:	Woven low pile, washable



MAGNETIC MAT CLEANING TOOL

CODE: MMCT19

Magnetics:	Rare earth
Magnet Surface Strengths Available:	8-10,000 gauss
Construction:	304 stainless steel
Magnet Diameter:	19 mm





MSA MAGNETICS

Head Office

14250 Judicial Road,
Burnsville, MN 55306, USA

(651) 272 2950

sales@msamagnetics.com

www.msamagnetics.com

YOUR SOURCE FOR FORCE